



DIODEN - MM1001B-111AB

Categories: Waveguide components

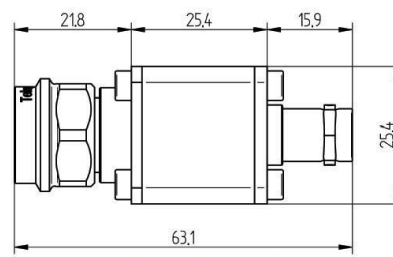

Outline Dimensions (mm(Inch))

BILDERGALERIE

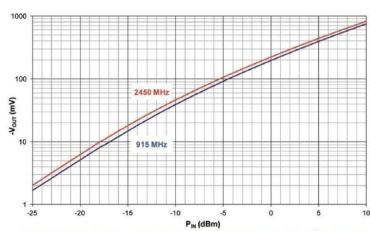

Typical transfer characteristic (f = 915 MHz and 2450 MHz, RLOAD = 33 kΩ, TA = 25 °C)

ADDITIONAL INFORMATION

| | |
|------------------------|--------------------|
| Frequency [MHz] | 915 & 2450 |
| Product group | Detectors / Diodes |