



# SOLID-STATE-MICROWAVE-GENERATOR - MR1000D-200ML

Categories: Microwave generators

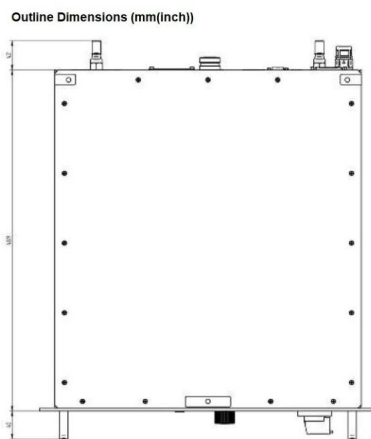

## BILDERGALERIE

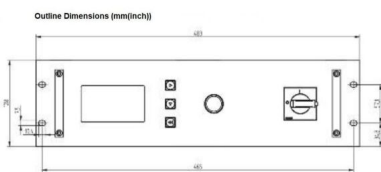

## ADDITIONAL INFORMATION

<b>Typ</b>	Solid State Microwave Generator
<b>Frequency [MHz]</b>	2450
<b>Output Power [W]</b>	1000
<b>Line connection</b>	1~ (L / N / PE)
<b>Control circuit connection [V]</b>	-
<b>Line Voltage [V]</b>	230
<b>Mains voltage control circuit [V]</b>	-
<b>Line Frequency [Hz]</b>	50 / 60
<b>Cooling</b>	Air / Water
<b>Pulse output power max [W]</b>	-
<b>Front-Panel (HMI)</b>	Operating Unit with Main Switch
<b>Interface</b>	front display
<b>Interface 2</b>	Can-Bus
<b>Interface 3</b>	A/D
<b>Interface 4</b>	-
<b>Interface 5</b>	-
<b>Width [mm (inch)]</b>	483 (19,02)
<b>Height [mm (inch)]</b>	128 (5,04)
<b>Depth [mm (inch)]</b>	571 (22,48)
<b>Protection</b>	IP20
<b>Output Connection Type</b>	7/16
<b>Output Connection</b>	Coaxial conductor
<b>Isolator</b>	No