

# POWER-SUPPLY (SWITCH-MODE) - MX3000D-177KL


**Category:** Microwave generators

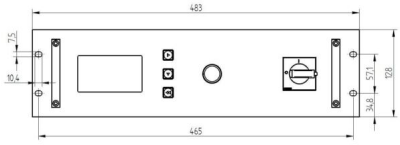


## BILDERGALERIE

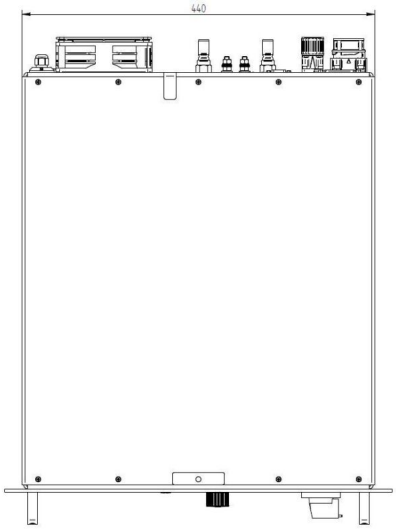


Muegge GmbH
Hochstrasse 4-6
64385 Reichelsheim
Germany

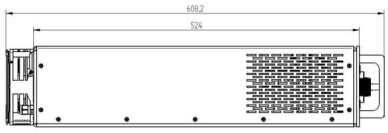T. +49 (0)6164-9307-0
F. +49 (0)6164-9307-93
E. info@muegge.de
www.muegge.de

## ADDITIONAL INFORMATION

| | |
|---|---|
| **Typ** | Power-Supply |
| **Frequency [MHz]** | 2450 |
| **Output Power CW [W]** | 3000 |
| **Line connection** | 3~ (L1 / L2 / L3 / PE) |
| **Control circuit connection [V]** | |
| **Line Voltage [V]** | 480 |
| **Mains voltage control circuit [V]** | |
| **Line Frequency [Hz]** | 50 / 60 |
| **Cooling** | Air / Water, Air / Water |
| **Pulse output power max [W]** | 3000 |
| **Front-Panel (HMI)** | Operating Unit with Main Switch, Operating Unit with Main Switch |
| **Interface** | front display |
| **Interface 2** | Can-Bus |
| **Interface 3** | A/D |
| **Interface 4** | – |
| **Interface 5** | – |
| **Width [mm (inch)]** | 484 (19,06) |
| **Height [mm (inch)]** | 128 (5,04) |
| **Depth [mm (inch)]** | 607 (23,90) |
| **Protection Class** | IP20 |
| **Isolator** | No |
| **Related Magnetron Head** | MH3000S-250BF, MH3000S-251BF, MH3000S-252BF |
| **Power-Supply** | Switch-Mode |

Muegge GmbH
Hochstrasse 4-6
64385 Reichelsheim
Germany

T. +49 (0)6164-9307-0
F. +49 (0)6164-9307-93
E. info@muegge.de
www.muegge.de